



V1 FILAMENT:  
5.2-5.5 VDC  
FILAMENT CURRENT:  
45 +/- 10 mA DC  
V2 ELECTRODE SOURCE:  
24-26 V DC TYP.  
ELECTRODE CURRENT:  
14 +/- 3.0 mA DC  
BALLAST RESISTOR:  
1K TYP.  
ELECTRODE RUNNING VOLTAGE:  
10 +/- 3.0 V DC  
TOTAL LAMP WATTAGE:  
.40 TYP.  
INTENSITY  
3000 Cd/m2 MIN.  
LIFE HOURS:  
\*15,000

\*TO 50% OUTPUT INTENSITY

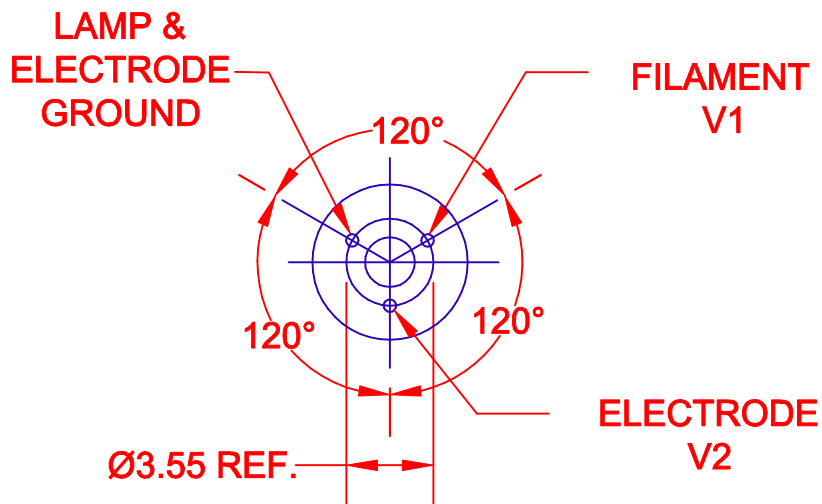

JKL PART NO.: BGF717-22

			<div>METRIC</div> <div></div> <div>THIRD ANGLE PROJECTION</div>		<div>DIMENSIONS ARE IN MILLIMETERS</div> <div>TOLERANCE UNLESS OTHERWISE SPECIFIED</div> <div>1 PL +/- 0.2</div> <div>2 PL +/- 0.20</div> <div>ANGLE +/- 0</div>		<div>JKL COMPONENTS CORPORATION</div> <div>TITLE</div> <div>MINIATURE HOT CATHODE FLUORESCENT LAMP (ACORN)</div>																			
B RELEASED TO CAD			5/9/01		DRAWN BY		APPY'D BY		DATE		SIZE		FSCM NO.		DRAWING NO.		BGF717-22									
A LIFE HRS-LEAD LENGTH			11/9/99		L. WENGSTROM		F.D.		5/9/01		A		55335													
RELEASED			7/2/99																							
REV. NO.			DESCRIPTION/ECO NUMBER		APPY'D DATE		- CAD DRAWING -		MANUAL REVISIONS NOT PERMITTED		SCALE		RELEASED DATE		7/2/99		REVISION DATE		5/9/01		REV. NO.		B		SHEET 1 OF 1	

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[JKL Components:](#)

[BGF717-22](#)