


KEMET Part Number: SMR7.5472J250K01L4BULK
(F211KG472J250C)

SMR/F211, Film, Metallized PPS, General Purpose, 4700 pF, 5%, 250 VDC, 125°C, Lead Spacing = 7.5mm

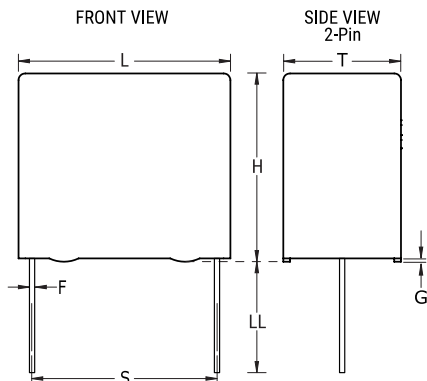

Dimensions

L	10mm MAX
H	8mm MAX
T	4mm MAX
S	7.5mm +/-0.4mm
LL	4mm +1mm
F	0.6mm +/-0.05mm
G	0.5mm NOM

Packaging Specifications

Packaging:	Bulk, Bag
Packaging Quantity:	1000

General Information

Series:	SMR/F211
Dielectric:	Metallized PPS
Style:	Radial
Features:	Audio Applications
RoHS:	Yes
Lead:	Wire Leads
Miscellaneous:	The rated voltage decreases 2%/C between +125C and +150C
Notes:	Case Size = KG

Specifications

Capacitance:	4700 pF
Capacitance Tolerance:	5%
Voltage AC:	160 VAC
Voltage DC:	250 VDC
Temperature Range:	-55/+150C
Rated Temperature:	125°C
Dissipation Factor:	0.15% 1kHz, 0.25% 10kHz, 0.50% 100kHz
Insulation Resistance:	30 GOhms
Max dV/dt:	30 V/us